






# Rack Cabinet with Flat Pack

Pre-assembled 19"



## Minimal encumbrance maximum practicality

The Intellinet cabinets are the result of an innovative project that meets the needs of structured cabling in data and telecommunications networks.

-  **Practicality and economy:** requires 50% less space allowing both to reduce logistics costs and to reduce shipping costs. Packaging designed for long distance shipment.
-  **Quick assembly:** it is supplied completely disassembled; assembly takes less than 10 minutes and no requires special tools.
-  **Robustness:** a frame with special profiles of 2 mm thick pre-welded steel guarantees a load capacity of up to 750 kg (server cabinets). Top and bottom have 4 mm thick corner joints for maximum stability.
-  **Versatility:** pair of 19" front and rear adjustable rails equipped with scales for fast and precise installations; removable side panels; reversible door with lock and 180° opening angle. Ventilated top for fan mounting.
-  **Accessories:** wide range of accessories to meet the needs of designers and installers.

### MADE IN ITALY:

CE certified product according to EN 62208 and manufactured according to the following international standards:  
IEC 297-1 / 2/3;  
EN 61439-1; EN 60529;  
EN 12150-1 and in compliance with the ISO 9001: 2008 standard



 **INTELLINET**  
NETWORK SOLUTIONS

MADE IN ITALY

[www.intellinet.it](http://www.intellinet.it)


# Rack Cabinet Flat Pack



Pre-assembled 19"

## Technical features:

- Bottom and top frame made in pre-welded steel with tubular section with 2mm thickness
- Reversible door with reinforced quick-release hinges and handle with key lock, 180° opening angle
- Removable blind side panels; removable rear panel available both blind and 40% vented; some models have a rear door with 75% vented panel
- Supplied with a pair of 19" front and rear rails with scale to facilitate the installation of the equipment
- Open bottom guarantees a wide passage of the cables; top ready with holes for ventilation system
- 4 x M10 leveling feet included in the supply
- Static capacity: 500 kg for 600 and 800mm cabinets and 750 kg for server cabinets
- RAL9005 standard color (black)
- Bottom closing plate and plinth are available as accessories and they can be purchased separately

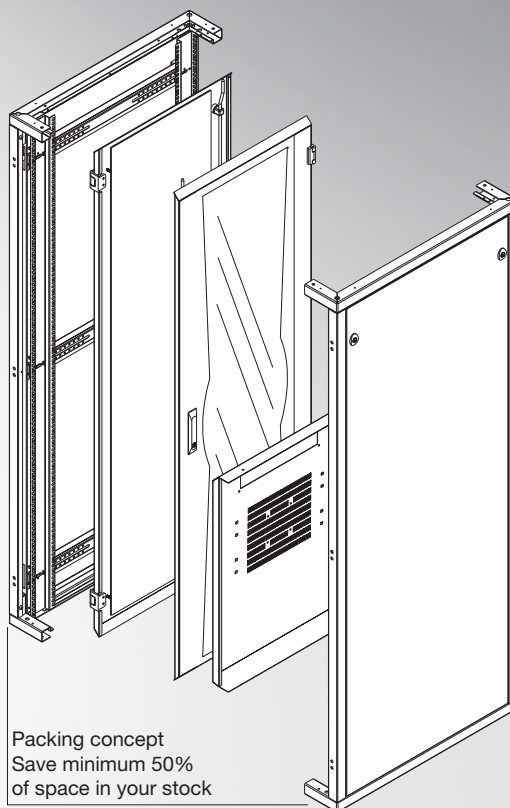

Packing concept  
Save minimum 50%  
of space in your stock



CODE	U	L mm	P mm	H mm	FRONT DOOR	BACK SIDE
I-CASE FP-2406BKX	24	600	600	1180	glass	blind panel
I-CASE FP-2408BKX	24	600	800	1180	glass	blind panel
I-CASE FP-2710BKX	27	600	1000	1314	glass	blind panel
I-CASE FP-2710BKXVG	27	600	1000	1314	glass	40% vented panel
I-CASE FP-2710BKXG	27	600	1000	1314	grigliata 75%	40% vented panel
I-CASE FP-2710VTBK	27	600	1000	1314	75% vented door	75% vented door
I-CASE FP-3306BKX	33	600	600	1580	glass	blind panel
I-CASE FP-3308BKX	33	600	800	1580	glass	blind panel
I-CASE FP-3388BKX	33	600	800	1580	glass	blind panel
I-CASE FP-4206BKX	42	600	600	1980	glass	blind panel
I-CASE FP-4208BKX	42	600	800	1980	glass	blind panel
I-CASE FP-4288BKX	42	600	800	1980	glass	blind panel
I-CASE FP-4210BKX	42	600	1000	1980	glass	blind panel
I-CASE FP-4210BKXVG	42	600	1000	1980	glass	40% vented panel
I-CASE FP-4210BKXG	42	600	1000	1980	75% vented door	40% vented panel
I-CASE FP-4210VTBK	42	600	1000	1980	75% vented door	75% vented door
I-CASE FP-4218BKX	42	800	1000	1980	glass	blind panel
I-CASE FP-4218BKXVG	42	800	1000	1980	glass	40% vented panel
I-CASE FP-4218BKXG	42	800	1000	1980	75% vented door	40% vented panel
I-CASE FP-4218VTBK	42	800	1000	1980	75% vented door	75% vented door

## Accessories:

PLINTH P/N	Dimension
I-CASE PLF-66	600 x 600
I-CASE PLF-68	600 x 800
I-CASE PLF-610	600 x 1000
I-CASE PLF-88	800 x 800
I-CASE PLF810	800 x 1000

BOTTOM PLATE	Dimension
I-CASE FP-BP66	600 x 600
I-CASE FP-BP68	600 x 800
I-CASE FP-BP610	600 x 1000
I-CASE FP-BP88	800 x 800
I-CASE FP-BP810	800 x 1000



MADE IN ITALY

[www.intellinet.it](http://www.intellinet.it)

