
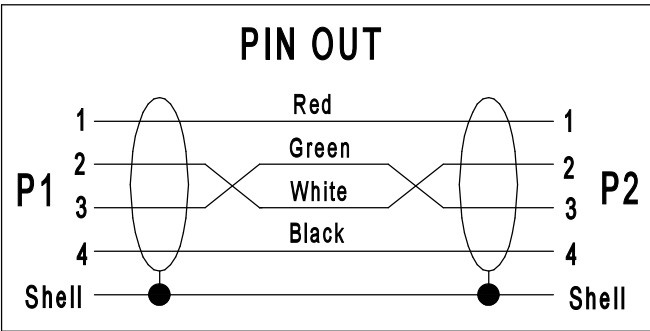


NO.	CONTENT OF REVISE	DATE	REV

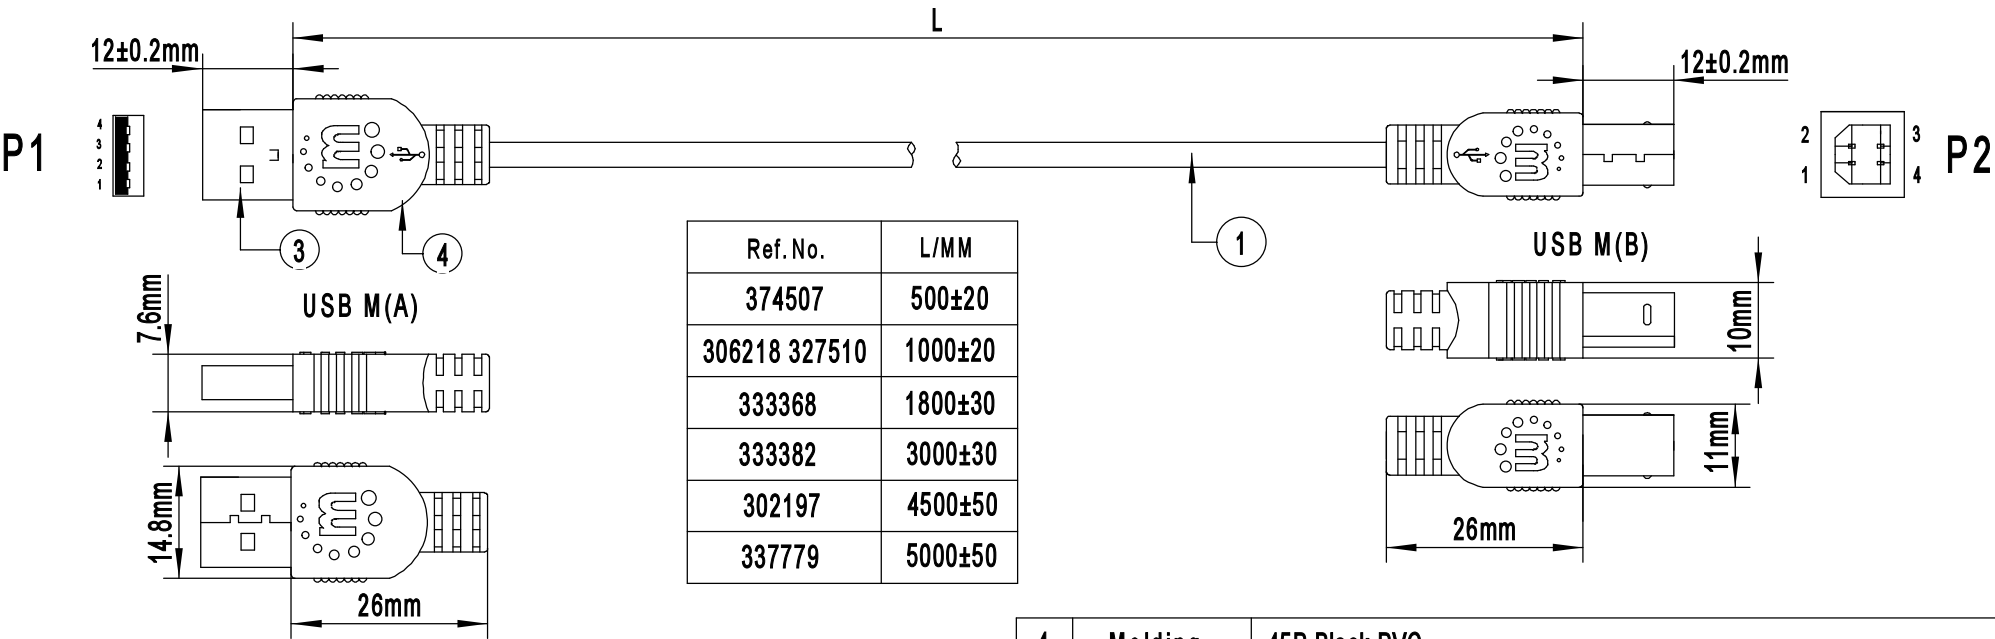

NOTE:

1.ELETRICAL TEST:

100%OPEN SHORT MISS WIRE TEST.

INSULATIONS:5M Ω

2.Marking:

www.manhattanproducts.com Exxxxxx ㉑ AWM 2725

80℃ 30V USB 2.0 CABLE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INTRACOM Asia Co.,Ltd. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF INTRACOM Asia Co.,Ltd.	
UNLESS OTHERWISE SPECIFIED:DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE:±1°	
TOLERANCE(INCH)	TOLERANCE(MM)
x ±0.02"	x ±0.5mm
x . x ±0.01"	x . x ±0.20mm
x . xx ±0.008"	x . xx ±0.15mm
x . xxx ±0.005"	x . xxx ±0.10mm

4	Molding	45P Black PVC
3	USB A/MALE	USB A/MALE Soldering type.The Pin Gold plating.Shell Nickel plating
2	USB B/MALE	USB B/MALE Soldering type.The Pin Gold plating.Shell Nickel plating
1	CABLE	{28AWG(7/0.12TC+HDPE)×1P+28AWG(7/0.12TC+PVC)×2C}+AL-foil+DW30#(7/0.10BC)+B(16/3/0.12ALM)OD=3.8±0.2mm:PVC JACKET:Color:Black
NO.	ITEM	DESCRIPTION

iCINTRACOM		安達康股份有限公司		INTRACOM Asia Co.,LTD.		V101625	
TITLE:			APPD				
			Check				
CUSTOMER:			Drawer				Date 2019.3.21
CUSTOMER P/N:			Unit	mm	Projection		
ICT P/N: 374507 333368 333382 302197 337779 306218 327510			Scale	1:1	Size.	A4	
DWG. NO:			Sheet	1 of	REV.	A/1	