

# F1109P-8-102W

9-Port Fast Unmanaged Switch With  
8-Port PoE

# F1109P-8-102W

## 9-Port Fast Unmanaged Switch With 8-Port PoE

---

### Products Description

F1109P-8-102W is a IP-COM switch that offers 9 10/100M RJ45 ports. Ports 1-8 comply with the IEEE802.3af standard (maximum PoE power output : 15.4w) and 802.3at standard (maximum PoE power output: 30W). The switch offers a maximum PoE power output of 92W and can supply power to exchange data with APs, IP cameras, and IP phones through CAT5e cables. It also provides simple management modes such as Standard, VLAN. Thus, F1109P-8-102W is a perfect choice for SMBs, hotels, and office to have small-scale HD surveillance and wireless networking.



- 9 10/100Mbps RJ45 ports with 8 port PoE
- Desktop installation
- Plug and play, Without configuration

## Key Feature

- Compliant with IEEE802.3, IEEE802.3u, IEEE802.3x, IEEE802.3af/at
- Store & forward, share memory, non-blocking architecture
- Supports MAC address self-learning and auto MDI/MDIX
- Provide 9 10/100Mbps auto-negotiation ports with 8-port PoE
- Ports 1-8: IEEE 802.3af/at PoE ports
- Supports full-duplex 802.3x flow control and half-duplex backpressure flow control
- Supports 2K MAC address list, MAC address learning and auto-ageing
- Supports port Inductive Lightning Protection up to 6KV
- Fanless design
- maximum power output of the switch: 92W
- Hardware DIP switch for selection among the Standard, VLAN modes.

Desktop Design

## Product Features

### large packet buffer

1Mb built-in packet buffer outstand in comparison, ensuring smooth transmission of large files and HD videos.

### 92W PoE power supply


Ports 1-8 comply with the IEEE802.3af and IEEE802.3at power supply standards. The entire switch offers a maximum PoE power output of 92W, whereas each ports offers a maximum PoE power output of 30W. The ports can be used to supply power to and exchange data with APs and IP cameras.

### Excellent Lightning-Proof design

Integrated professional lightning-proof circuit which supports uplink port and power supply lightning-proof (common mode protection 6KV). Effectively reduce the damage to the network system caused by the thundery weather.

### 2 Network operation modes offered

Hardware DIP switch for selection among the Standard, VLAN modes. Switch to VLAN mode to prevent broadcast storm and defend against DHCP spoofing .

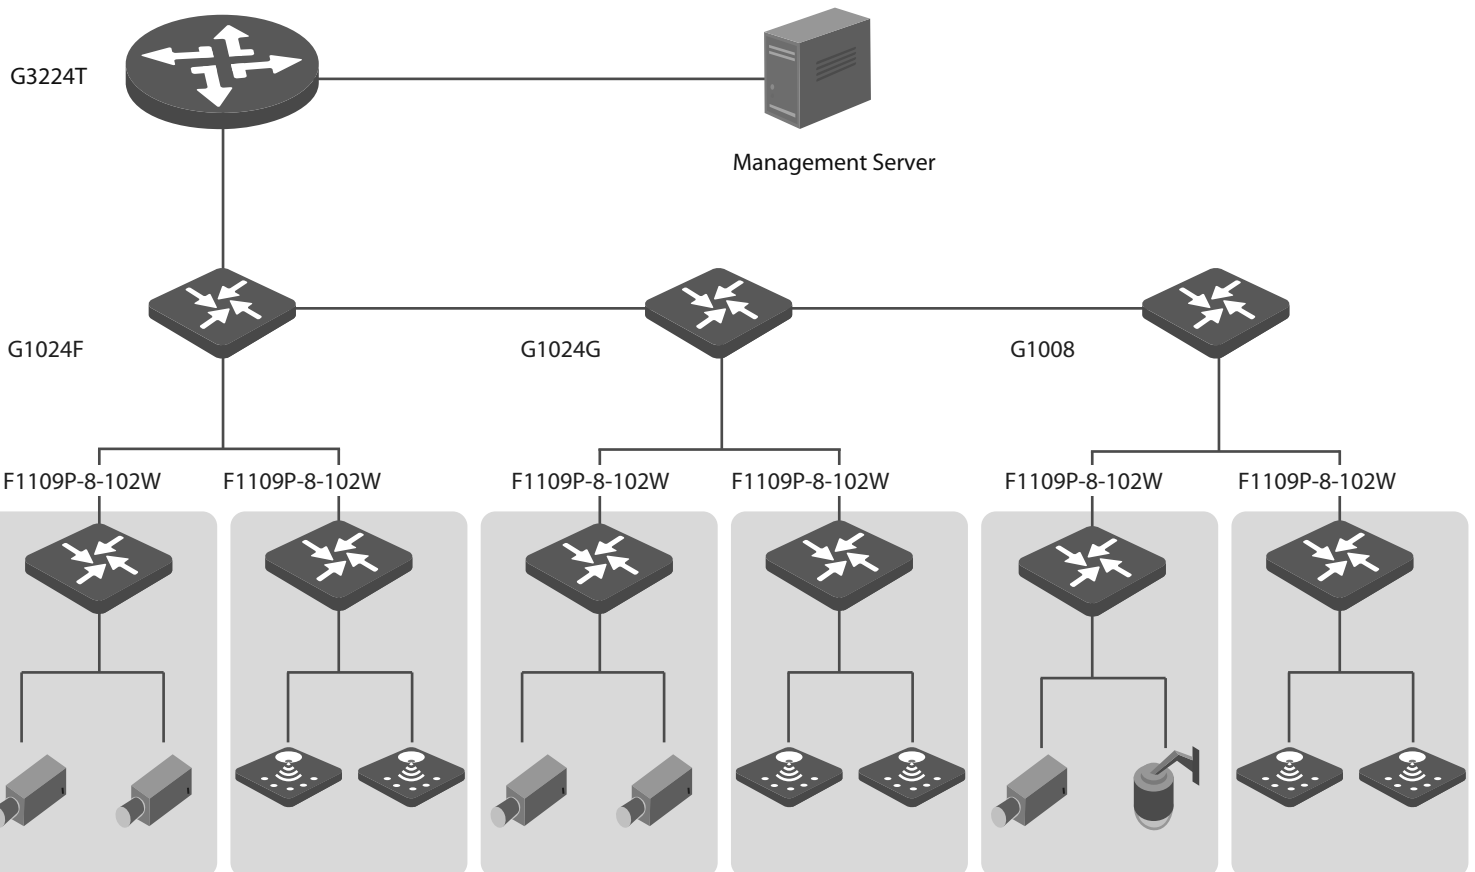

Product Model		F1109P-8-102W v1.0
Hardware Features		
Standard&Protocol	IEEE 802.3/IEEE 802.3u/IEEE 802.3x IEEE 802.3af/IEEE 802.3at	
Indicator	9*Link/Act per device 1*Power per device	
Interface	8 10/100Base-T ports(Data/Power) , 1 10/100Base-T ports(Data)	
Port Lightning Protection	6KV for uplink port	
Store and forward	Yes	
Exchange Capacity	1.8 Gbps	
Packet forwarding rate	1.34Mpps	
Packet buffer	1Mb	
MAC Address Table	2K	
PoE supply management	Port 1-8 support IEEE802.3at/af PoE standard	
PoE through pin	1 2 4 5 + ; 3 6 7 8 -	
Voltage input range	AC: 100-240V~50/60Hz	
Dimensions ( W x D x H )	177.5*104*26mm	
Power Consumption	In full configuration: 102W PoE Max Power Supply: 92W	
Port Features	<p>Standard: the switch functions as a common unmanaged switch and all the ports of the switch can communicate with each other.</p> <p>VLAN: ports 1 to 8 are isolated from each other, but can communicate with ports 9 (uplink port) respectively. Which also support 250m long distance transmission</p>	
Environment	<p>Operating Temperature: 0℃~40℃ (32°F~104°F)</p> <p>Storage Temperature: -40℃~70℃ (-40°F~158°F)</p> <p>Operating Humidity: 10%~90% non-condensing</p> <p>Storage Humidity: 5%~90% non-condensing</p>	



## Headquarters

IP-COM Networks Co.,Ltd.

Tel: +86 755-27653089

Fax: +86 755-27657178

Email: [marketing@ip-com.com.cn](mailto:marketing@ip-com.com.cn)

Website: [www.ip-com.com.cn](http://www.ip-com.com.cn)

ADD: Tower E3, No1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China.

Copyright©2016 IP-COM Networks Co., Ltd. All Rights Reserved.

