



TOP


| Model No. | Capacity(U) | Width (mm) | Depth (mm) | Height (mm) |
|-----------|-------------|------------|------------|-------------|
| SA6420 | 20 | 600 | 600 | 990 |

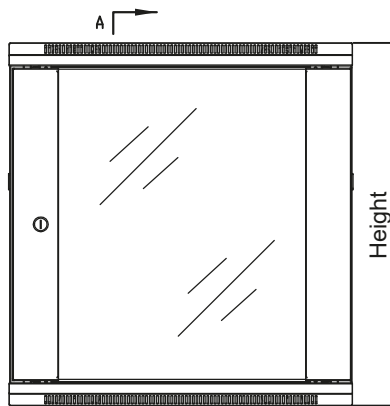


FRONT

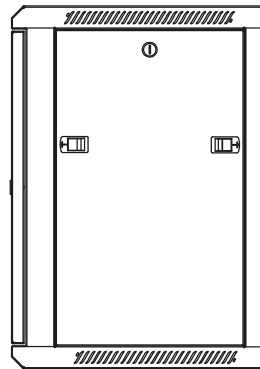

SIDE

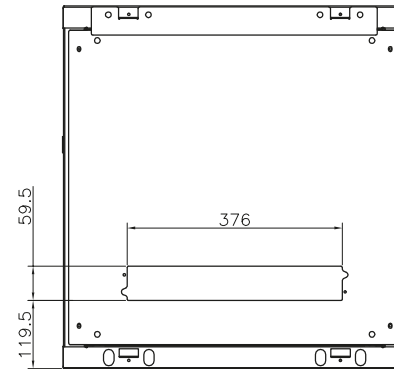

BACK

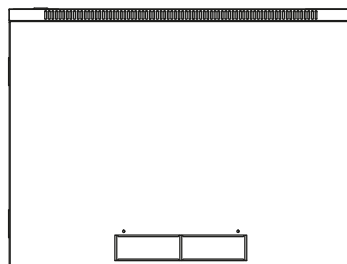

BOTTOM

Standard:

Comply with ANSI/EIA
RS-310-D IEC297-2 DIN41494;PART1
DIN41494;PART7 ;

Material:

SPCC Cold Rolled Steel
19" rails" 1.5mm, side panel" 1.2mm
others: 1.0mm

Loading capacity:

Static loading:,60KG

Feature:

- **Completely transparent toughened front door, quick open the side panel and rear panel, convenient and flexible**
- The overall welding structure, firm structure, static load bearing of up to 60 kg,
- The top and bottom can be closed knock off type 2 place walk line channel
- Before and after the Angle gauge can move
- Backplane removable, can be completely opened on the back