


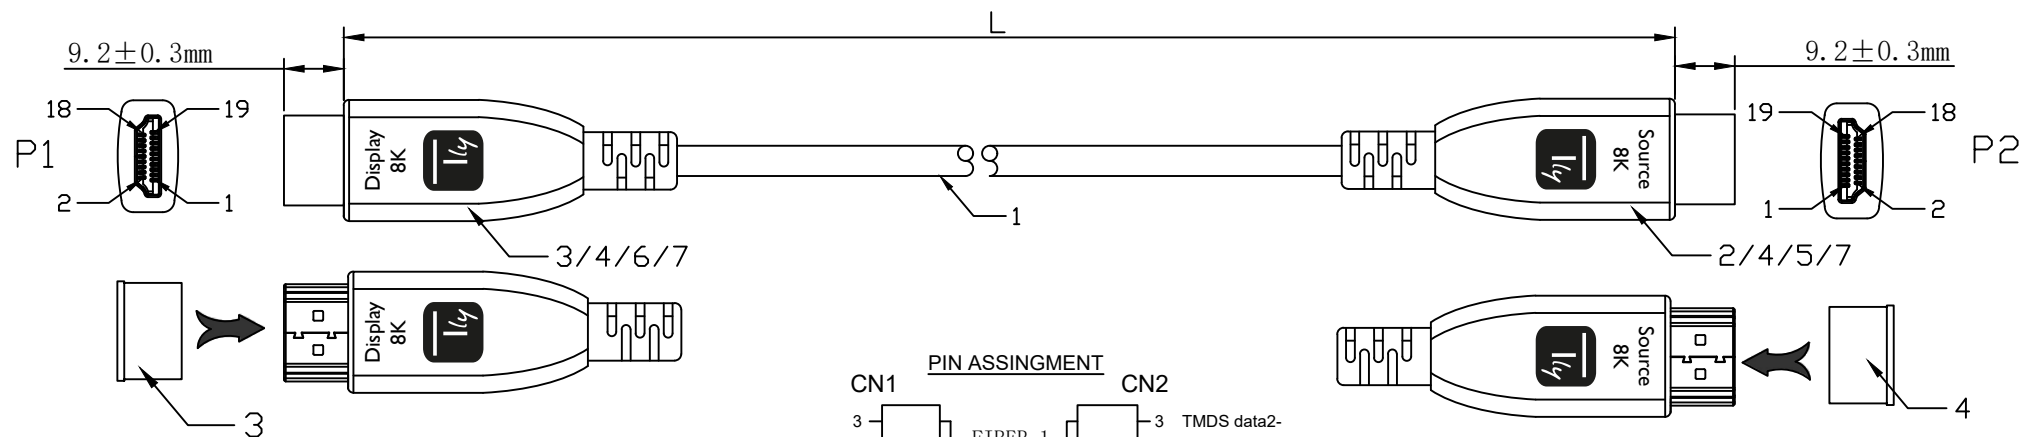

Remark:


1. Compatible with all HDMI a connector interface devices.
2. Support 8K Output.
3. Support up to 48Gbps bandwidth.

PIN ASSINGMENT	
CN1	CN2
3	3 TMDs data2-
1	1 TMDs data2+
2	2 TMDs data2 Shield
6	6 TMDs data1-
4	4 TMDs data1+
5	5 TMDs data1 Shield
9	9 TMDs data0-
7	7 TMDs data0+
8	8 TMDs data0 Shield
12	12 TMDs Clock-
10	10 TMDs Clock+
11	11 TMDs Clock Shield
13	13 CEC
14	14 N.C
15	15 LCL
16	16 LDA
17	17 GND
18	18 +5V Power
19	19 HPD
Shell	Shell

P/N: ICOC HDMI-HY8-010 - 10 m
P/N: ICOC HDMI-HY8-015 - 15 m
P/N: ICOC HDMI-HY8-020 - 20 m
P/N: ICOC HDMI-HY8-030 - 30 m



⑦	SR	Black	2PCS
⑥	Shell	HDMI Zinc alloy, Upper and lower shell, Dark Gray, "Source + HDMI" logo	1sets
⑤	Shell	HDMI Zinc alloy, Upper and lower shell, Dark Gray, "Display + HDMI" logo	1sets
④	Cap	HDMI Protective Cap, PE	2pcs
③	Connector	HDMI 2.1 AM, RX, Green PCBA + 8K Module, Gold-plated, Bule LCP	1pcs
②	Connector	HDMI 2.1 AM, TX, Red PCBA + 8K Module, Gold-plated, Bule LCP	1pcs
①	Cable	(FIBER*4C+MID)*1C+[30AWG(1/0.26BC)*1P+D+AL]+30AWG(1/0.25BC)*4C+24AWG(1/0.511BC)*1C+F+AL+TPE JACKET OD:4.7mm	



ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	HDMI 2.1 Active Optical Cable	PAGE NO	1/1
		DATE	2022/05/05