





Front

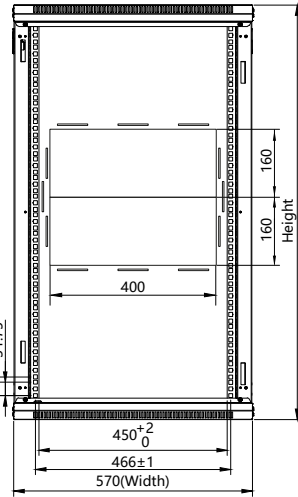


Front (move door)

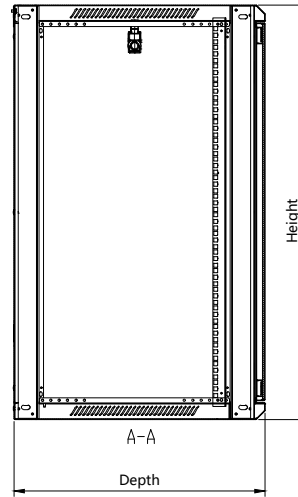

Side

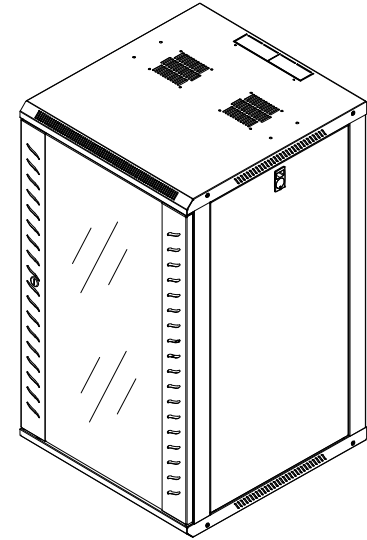

Top



Bottom

Model	Color	Height	Depth
I-CASE FP-6006BK	Black	368	600
I-CASE FP-6006G	Grey	368	600
I-CASE FP-6009BK	Black	502	600
I-CASE FP-6009G	Grey	502	600
I-CASE FP-6012BK	Black	635	600
I-CASE FP-6012G	Grey	635	600
I-CASE FP-6015BK	Black	778	600
I-CASE FP-6015G	Grey	778	600
I-CASE FP-6020BK	Black	991	600
I-CASE FP-6020G	Grey	991	600

Model	Color	Height	Depth
I-CASE FP-4506BK	Black	368	450
I-CASE FP-4506G	Grey	368	450
I-CASE FP-4509BK	Black	502	450
I-CASE FP-4509G	Grey	502	450
I-CASE FP-4512BK	Black	635	450
I-CASE FP-4512G	Grey	635	450
I-CASE FP-4515BK	Black	778	450
I-CASE FP-4515G	Grey	778	450
I-CASE FP-4520BK	Black	991	450
I-CASE FP-4520G	Grey	991	450

Standard:

Comply with ANSI/EIA, RS-310-D, IEC297-2, DIN41494, PART1, DIN41494, PART7

Material:


SPCC Cold Rolled Steel
 19" rails: 1,2 mm, back panel/side panel: 0,8 mm
 roof and floor: 1,0 mm
 others: 1,2 mm

Loading capacity:

static loading: 60 kg

Features:

- Transparent toughened front door, side plate and back plate can be opened quickly, convenient and flexible;
- bulk wall cabinet, easy to assemble, firm structure, static load up to 60kg;
- top and bottom can be closed knock down type 2 wiring channel;
- the Angle meter can be moved forward and backward;
- the backplane is detachable and the back can be fully opened.

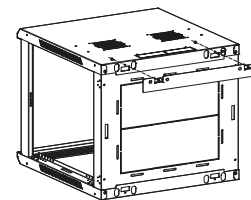

With fixing bar