


REV.	DESCRIPTION	ENG.	APPROVAL

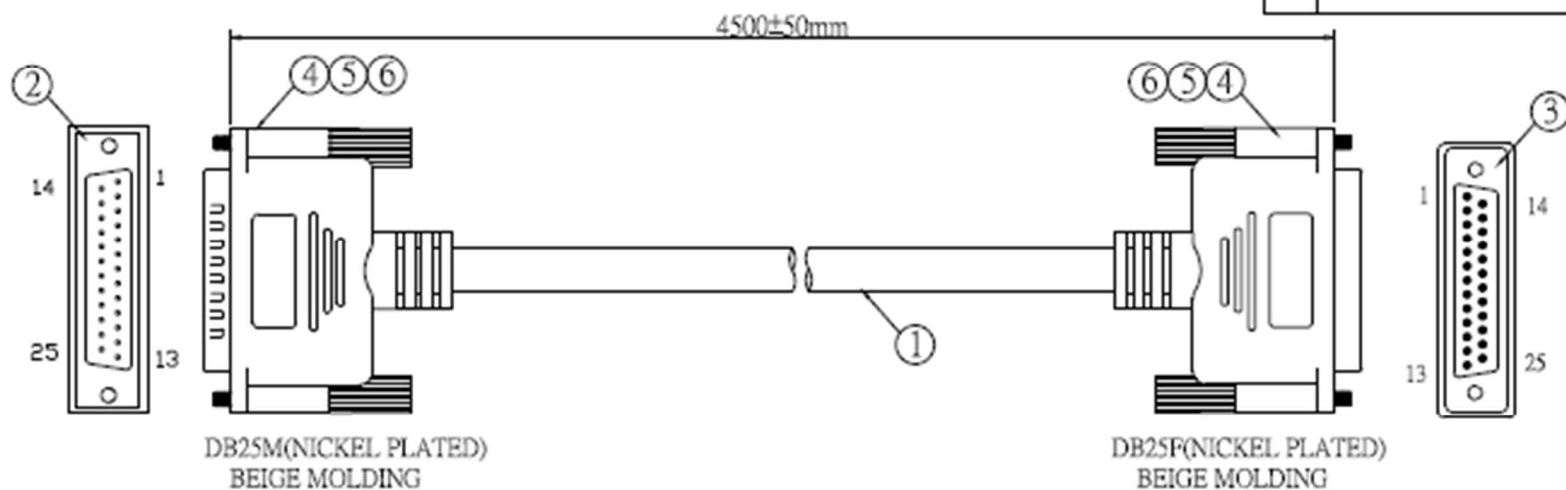

PIN ASSIGNMENT:

DB25M	1	2	3		23	24	25	64
DB25F	1	2	3		23	24	25	64

OPEN/SHORT TEST:100% TEST.

INSULATION:5M.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INTRACOM Asia Co.,Ltd. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF INTRACOM Asia Co.,Ltd.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1°

TOLERANCE(INCH)	TOLERANCE(MM)
x	±0.5mm
x.x	±0.20mm
x.xx	±0.15mm
x.xxx	±0.10mm



TITLE:	APPD				
	Check				
CUSTOMER:	Drawer	GDH		Date	
				2013.11.12	
CUSTOMER P/N:	Unit	mm	Projection	⌀	
ICT P/N: 301886	Scale	1:1	Size	A4	
DWG.NO:	Sheet	1 of	REV.	A	

6	PE	5G
5	PVC 45P Beige	14G
4	Screw:QC24 Beige	4PCS
3	DB25F(Black Insulator,Nickel plated)	1PCS
2	DB25M(Black Insulator,Nickel plated)	1PCS
1	NON-UL,AL-FOIL,30W*25C+1,BEIGE COLOR,OD=7.0mm,PVC JACKET.	1PCS
No.	Description	QTY