

*With UL-2919 rated VGA cables.

Introduction

The Video Splitters, 169349 ,169356 and 169363 broadcast and boost one VGA signal source for 2, 4 or 8 VGA monitors respectively. There is no software or interface card to install. Just connect the cables, power up the system and you are ready to have duplicated VGA images for multiple monitors with excellent quality. Superb high bandwidth circuit enables high-resolution VGA signal of 350Mhz to be displayed on multiple monitors.

Application:

- presentations
- exhibits
- demonstration
- trade shows
- monitor testing and burn-in
- business meetings

Features

- Duplicate one VGA input to multiple VGA outputs.
- Effective transmission distance: 65M (210ft)*
- Automatic power-save when VGA input is lost.
- Applicable to VGA, SVGA and multi-sync monitors.
- Cascaded operation for increased VGA outputs.
- Crisp clear VGA images

Connection

One piece of HDB15 male-to-female cable is required to connect from the Video Splitter Input to a computer's VGA output. Multiple monitors should be connected to the Video Splitter's output ports as shown below.

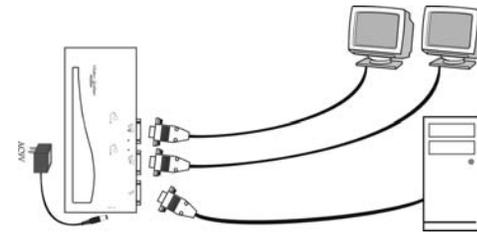


Figure 1 : 169349 Connection

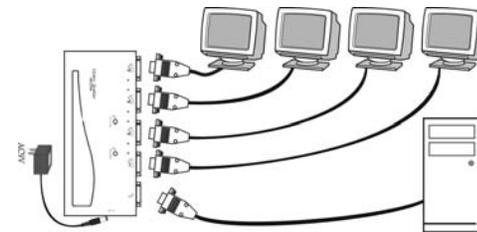


Figure 2 : 169356 Connection

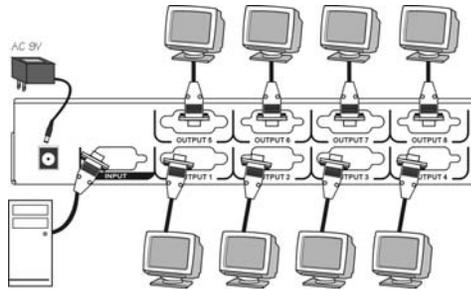


Figure 3 : 169363 Connection

Operation

- ▶ ACTIVE LED turns on when there is VGA signal at the Input port.
- ▶ POWER LED turns on when the Video Splitter is powered up by the AC 9V power adapter.

Specification

Function	169349	169356	169363
Number of VGA output	2	4	8
Signal bandwidth	350Mhz		300Mhz
Signal type	VGA, SVGA, Multi-sync		
LED	POWER (green) x 1 ACTIVE (amber) x 1		
Cable length	65M (210ft) Max.		
Connector -	HDB15 male x 1		
Input	HDB15 female x 2	HDB15 female x 4	HDB15 female x 8
Output			
Power consumption	AC 9V, 200mA, normal operation 10mA, power-save mode		
Enclosure	Metal		
Weight	400g	428g	720g
Dimension (mm)	20 x 85 x 180		40x196 x70



Limited Warranty

IN NO EVENT SHALL THE DIRECT VENDOR'S LIABILITY FOR DIRECT OR INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES, LOSS OF PROFIT, LOSS OF BUSINESS, OR FINANCIAL LOSS WHICH MAY BE CAUSED BY THE USE OF THE PRODUCT EXCEEDS THE PRICE PAID FOR THE PDOCUMENT.,

The direct vendor makes no warranty or representation, expressed or implied with respect to the contents or use of this documentation, and especially disclaims its quality, performance, merchantability, or fitness for any particular purpose.

The direct vendor also reserves the right to revise or update the product or documentation without obligation to notify any user of such revisions or updates. For further information, please contact your direct vendor.

All the brand names and registered trademarks are the property of their respective owners.