



Cat.6A Waterproof Cable Extender

Part no.: NP0082

Technical Features


LAN cable extender, toolless

Cable gland housing, IP68 waterproof

For cable diameters from 5 to 7.5mm

Color: Black

Technical Drawing

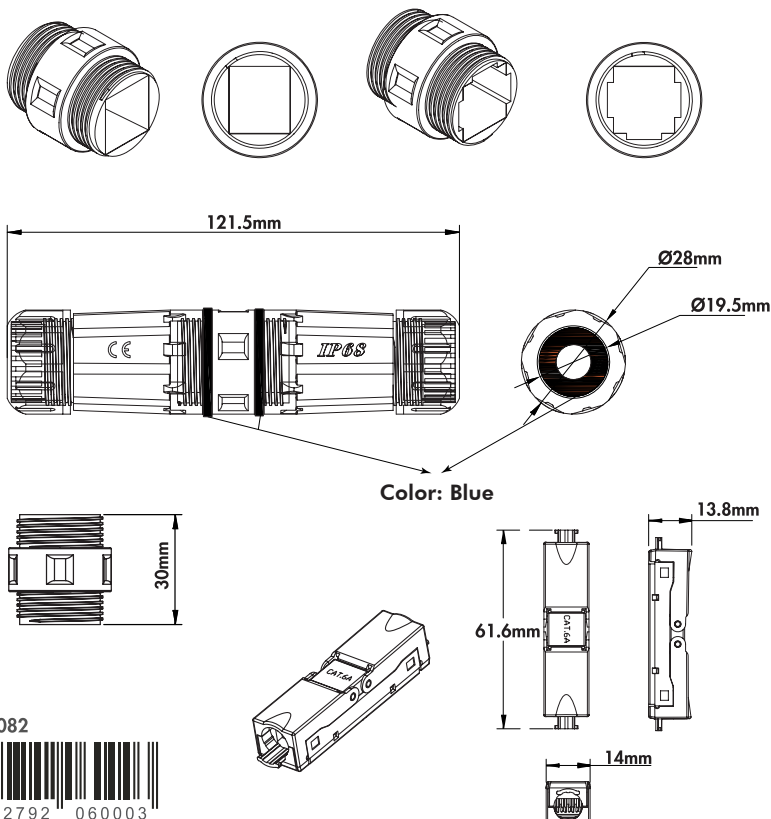

Electrical:

1. Voltage Rating: 125 VAC RMS
2. Current Rating: 1.5AMP
3. Contact Resistance: 100 Milliohms max
4. Insulation Resistance: 1000 Megohms min @500 VDC
5. Dielectric Strength: 750 VAC RMS 60HZ, 1 min

Environmental:

1. Storage: -40°~85°
2. Operation: 0°~70°

Mechanical:

1. The Shell Material: Zinc Alloy
2. Housing Material: PC
3. Insert Material: Flame Retardancy PBT
4. PCB Material: FR-4 T=1.6mm
5. Contact Material: Phosphor Bronze Stamp PIN T=0.30mm
6. IDC Contact Material: Phosphor Bronze T=0.50mm with TIN plating
7. IDC Life: 200 times min
8. Wire: AWG22-26

NP0082



4 052792 060003


Made in China

www.logilink.com



RoHS
compliant

*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.

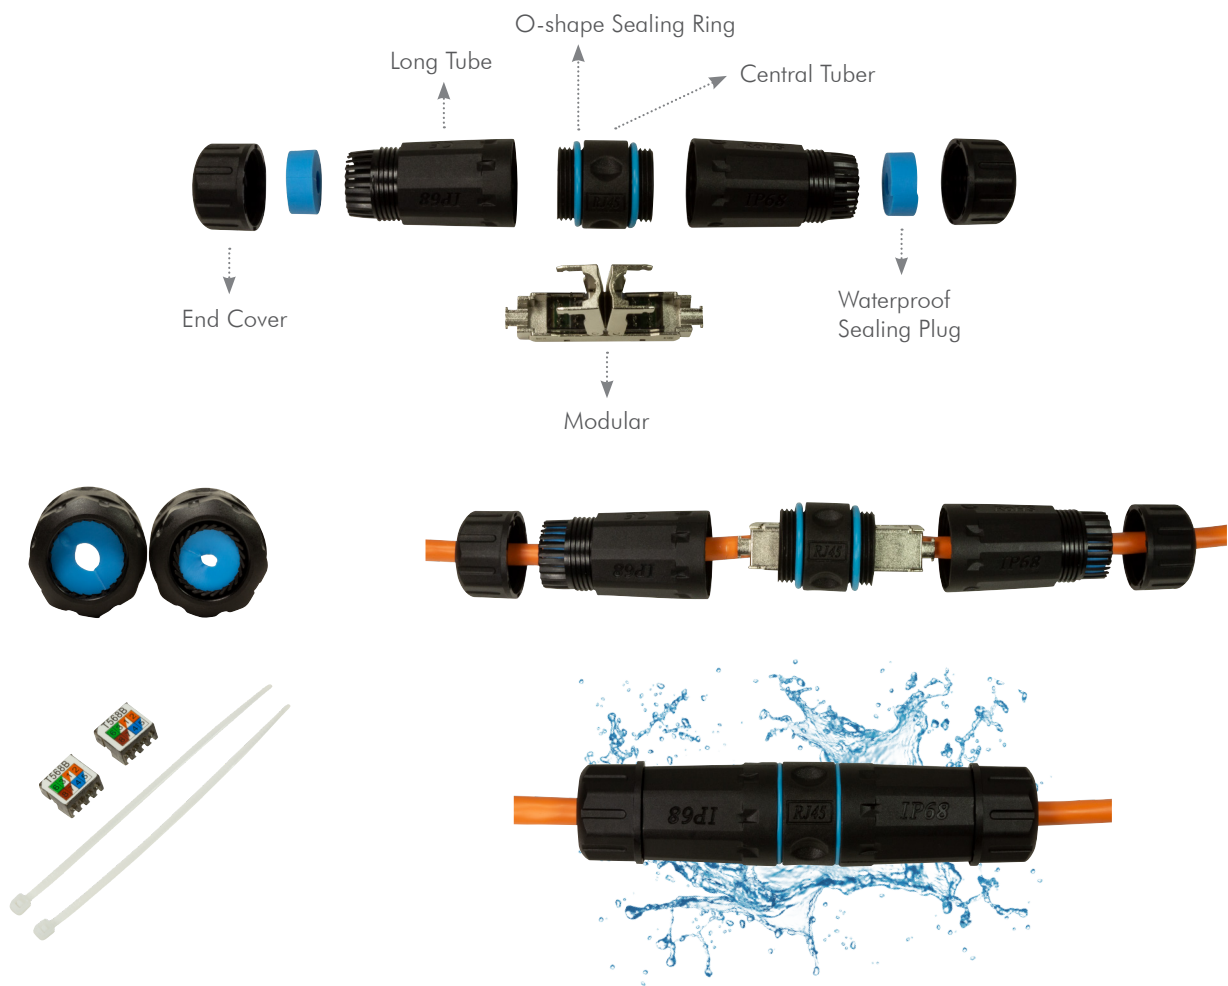

Package Content

Cat.6A Waterproof Cable Extender x 1

Packaging Information

Packing Dimension	mm
Packing Weight	kg
Carton Dimension	mm
Carton Q'ty	pcs
Carton Weight	kg

NP0082



4 052792 060003

Made in China

www.logilink.com



RoHS
compliant

*The specifications and pictures are subject to change without prior notice.
*All trade names referenced are the registered trademarks of their respective owners.