Tenda

More Than a DSL Modem & WiFi Router

Wireless N300 ADSL2+ Modem Router D301

D301 is an 802.11n-compliant device that combines the function of high speed ADSL2+ modem, wireless router and 4-port switch. It delivers up to 8x faster wireless speed and 6x farther range than 802.11g. D301 also supports the latest ADSL2/2+ standards to provide higher performance and longer reach from ISP's DSLAM. Connect it to the Internet service and provide up to 300Mbps wireless network for sharing high volume files, streaming music, videos, even online gaming among multiple computers. Additionally, with versatile USB port, you can easily share files and media from an external USB storage device with your friends or family.





All-in-One Device

The D301 is a true one-stop solution, serving as a wired and wireless modem and router. It combines all the functionality of ADSL 2/2+ modem, WiFi router, and 4-port switch, and adds to it with a range of features, including USB sharing, IPTV, easy setup, and TR069.



Enhanced Wireless Performance

The D301 is an 802.11n-compliant device that delivers wireless speeds of up to 300Mbps, makes it easy for multiple users to share Internet access, files and printing. Enjoy bandwidth-intensive activities like gaming and media with less lag and performance degradation.



Powerful and Wide Coverage

Featuring 2x5dBi external antenna, the D301 provides a boosted signal to ensure wireless coverage all around your home. Plus, with MIMO technology, it uses signal reflections to reduce dead spots, providing better wireless performance, transmission rates, stability and coverage.



USB Sharing

The D301 provides a USB 2.0 port, which you can attach an external hard drive or an USB printer to your network, allowing you to share files or print wirelessly throughout your home.



Advanced Wireless Security

The D301 offers multi-level wireless encryption options to prevent unauthorized access and protect your important data, including 128-bit WEP, WPA and WPA2, as well as wireless access control based on MAC address.



6000V Lightning Protection

Lightning brings strong currency surge which can cause great damage to electronic devices like modem router. Designed with up to 6000 voltage lightning protection, the D301 can effectively avoid such damage. Thus it is ideal for use in areas where tough thunderstorms happen frequently



Main Features


- ADSL 2/2+ Modem, WiFi Router, and four-port switch in a single device;
- Connects your computers, smartphones and pads at wireless transfer rates of up to 300 Mbps;
- Easily share files and media from an external USB storage device with your friends or family;
- Industrial-strength security like WPA/WPA2 protects your wireless communication;

System Requirements

- Computer with: Windows 7/Vista/XP, Mac OS or Linux OS
- Microsoft IE, FireFox, or Safari browser
- CD-ROM drive
- Network adapter
- ADSL Internet service

Specification

Hardware Features		
	IEEE 802.11n, IEEE 802.11g, IEEE 802.11b	
Standards Features Interface	IEEE 802.3, IEEE 802.3u	
	ANSI T1.413, ITU G.992.1, ITU G.992.2, ITU G.992.3, ITU G.992.5	
	1* RJ11 port	
	1* USB 2.0	
	3*10/100Mbps auto-negotiation (Auto MDI/MDIX) LAN ports;	
	1*10/100Mbps auto-negotiation WAN/LAN Interchangeable port (Auto MDI/MDIX)	
Antenna	2* external omni-directional antennas	
Button	1* Power	
	1* Reset/WPS Input: 100-240V 50/60MHz	
Power	Output: 9V DC-1A	
Temperature	Operating Temperature: 0°C ~ 40°C;	
	Storage Temperature: -40°C~70°C	
	Operating Humility: 10% ~ 90% RH Non-condensing	
Humidity	Storage Humility: 5% ~ 90% RH Non-condensing	
Dimensions (L*W*H) mm	171.61mm*111.16mm*34.47mm	
LED	POWER, Internet, DSL, WLAN, LAN, SYS, USB, WPS	
Transmission Media	Cat.5	
	Cat.5e	
	Cat.6	
	Telephone Line	
Wireless Features		
Wireless Speed	300Mbps	
Frequency	2.4GHz	
	Wireless Radio: On/Off	
	SSID Broadcast: On/Off;	
	WDS: On/Off	
Basic Features	SSID Configurable	
	Channel: Auto, 1-13	
	Network Mode: 11b only, 11g only, 11n only, 11bg mixed, 11bgn mixed	
	Channel Bandwidth: Auto, 20MHz, 40MHz	
	Wireless Access Control (Wireless MAC filter)	
Security	Wireless Security: On/Off	
	64-/128-bit WEP	
	WPA-PSK/WPA2-PSK	
Operating Mode	Wireless-N ADSL2+ Modem Router	
Software Features		
	Dynamic IP,	
	Static IP	
Internet Connection Type	PPPoE	
and the comment of th	PPPoA	
	IPoA	
DHCP Server	Yes	
Virtual Server	Yes	
Security	Port/URL/MAC Filter	
DDNS	Yes	
IPTV	Yes	
IPv6	Yes	
TR069	Yes	
TR069 VPN Passthrough	Yes PPPTP, L2TP, IPsec	
TR069 VPN Passthrough Bandwidth Control	Yes PPPTP, L2TP, Psec Yes	
TR069 VPN Passthrough Bandwidth Control Static Routing	Yes PPPTP, L2TP, Psec Yes Yes	
TR069 VPN Passthrough Bandwidth Control Static Routing Logs	Yes PPPTP, L2TP, Psec Yes Yes Yes	
TR069 VPN Passthrough Bandwidth Control Static Routing Logs VLAN	Yes PPPTP, L2TP, Psec Yes Yes	
TR069 VPN Passthrough Bandwidth Control Static Routing Logs	Yes PPPTP, L2TP, Psec Yes Yes Yes	
TR069 VPN Passthrough Bandwidth Control Static Routing Logs VLAN	Yes PPPTP, L2TP, Psec Yes Yes Yes	
TR069 VPN Passthrough Bandwidth Control Static Routing Logs VLAN	Yes PPPTP, L2TP, Psec Yes Yes Yes Yes S02.1Q VLAN	
TR099 VPN Passthrough Bandwidth Control Static Routing Logs VLAN Others	Yes PPTP, L2TP, Psec Yes Yes Yes 802.1Q VLAN	
TR069 VPN Passthrough Bandwidth Control Static Routing Logs VLAN	Yes PPPTP, L2TP, Psec Yes Yes Yes 302.1Q VLAN D301 Power Adapter	
TR099 VPN Passthrough Bandwidth Control Static Routing Logs VLAN Others	Yes PPPTP_LZTP, Psec Yes Yes Yes Soz. 10 VLAN D301 Power Adapter Outick hstall Guide	
TR069 VPN Passthrough Bandwidth Control Static Routing Logs VLAN Others	Yes PPPTP, L2TP, Psec Yes Yes Yes 802.1Q VLAN D301 Power Adapter Quick hstall Guide Ethernet Cable ADSL Splitter 2 Telephone Lines	
TR069 VPN Passthrough Bandwidth Control Static Routing Logs VLAN Others	Yes PPPTP_LZTP_Psec Yes Yes Yes Yes Soc. 10 VLAN D301 Power Adapter Quick Install Guide Ethernet Cable ADSL Spitter 2 Telephone Lines Login P address: 192-168.1.1	
TR099 VPN Passthrough Bandwidth Control Static Routing Logs VLAN Others Package Contents	Yes PPPTP, L2TP, Psec Yes Yes Yes 802.1Q VLAN D301 Power Adapter Ouick Install Guide Ethernet Cable ADSL Splitter 2 Telephone Lines Login P address: 192.168.1.1 Internet Connection Type Bridge/PPPoE/PPPoA/IPoA/Static P/Dynamic P	
TR099 VPN Passthrough Bandwidth Control Static Routing Logs VLAN Others	Yes PPPTP, LZTP, Psec Yes Yes Yes Soz. 10 VLAN D301 Power Adapter Quick Install Guide Ethernet Cable ADSL Spitter 2 Telephone Lines Login P address: 192.168.1.1 Internet Connection Type Bridge/PPPoE/IPPOA/IPoA/Static P/Dynamic P SSID: Tenda _xxxxxx (xxxxxxxxxxxxxxxxxxxxxxxxxxxxx	
TR099 VPN Passthrough Bandwidth Control Static Routing Logs VLAN Others Package Contents	Yes PPPTP, L2TP, Psec Yes Yes Yes 802.1Q VLAN D301 Power Adapter Ouick Install Guide Ethernet Cable ADSL Splitter 2 Telephone Lines Login P address: 192.168.1.1 Internet Connection Type Bridge/PPPoE/PPPoA/IPoA/Static IP/Dynamic IP SSID: Tenda_xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx	
TR069 VPN Passthrough Bandwidth Control Static Routing Logs VLAN Others Package Contents	Yes PPPTP_LZTP_Psec Yes Yes Yes Yes S02.1Q VLAN D301 Power Adapter Quick hatall Quide Ethernet Cable ADSL Spitter 2 Telephone Lines Login P address: 192.168.1.1 Internet Connection Type Bridge/PPPoE/IPPOA/IPoA/Static IP/Dynamic IP SSID: Tenda_xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx	
TR069 VPN Passthrough Bandwidth Control Static Routing Logs VLAN Others Package Contents Factory Default Settings	Yes PPPTP, L2TP, Psec Yes Yes Yes B02:10 VLAN D301 Power Adapter Quick Install Guide Ethernet Cable ADSL Splitter 2 Telephone Lines Login P address: 192.168.1.1 Internet Connection Type Bridge/PPPDE/IPPDA/IPDA/Static IP/Dynamic IP SSID: Tenda yxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx	
TR069 VPN Passthrough Bandwidth Control Static Routing Logs VLAN Others Package Contents	Yes PPPTP_LZTP_Psec Yes Yes Yes Yes S02.1Q VLAN D301 Power Adapter Quick hatall Quide Ethernet Cable ADSL Spitter 2 Telephone Lines Login P address: 192.168.1.1 Internet Connection Type Bridge/PPPoE/IPPOA/IPoA/Static IP/Dynamic IP SSID: Tenda_xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx	

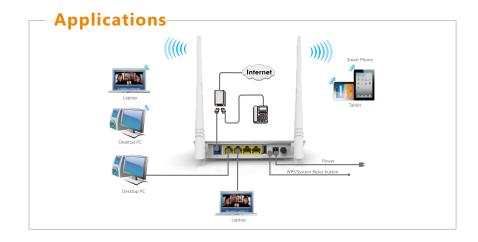

Shenzhen Tenda Technology Co.,Ltd No. 34-1 Shilong Road Shiyan Town, Baoan District Shenzhen 518108,China Phone: (86 755) 2765 7180 Fax: (86 755) 2765 7178 Email: sales@tenda.com.cn

support@tenda.com.cn

http://www.tendacn.com

(E () FC () C











© 2013 SHENZHEN TENDA TECHNOLOGY CO.,LTD,the Tenda logo is registered trademark of shenzhen Tenda Technology Co.,Ltd in China and/or other countries. Other brand and product names are trademarks or registered trademarks of their respective holders. Information is subject to change without notice.ALL rights reserved.